



落ち蓋式U形側溝（道路側溝）

JIS規格

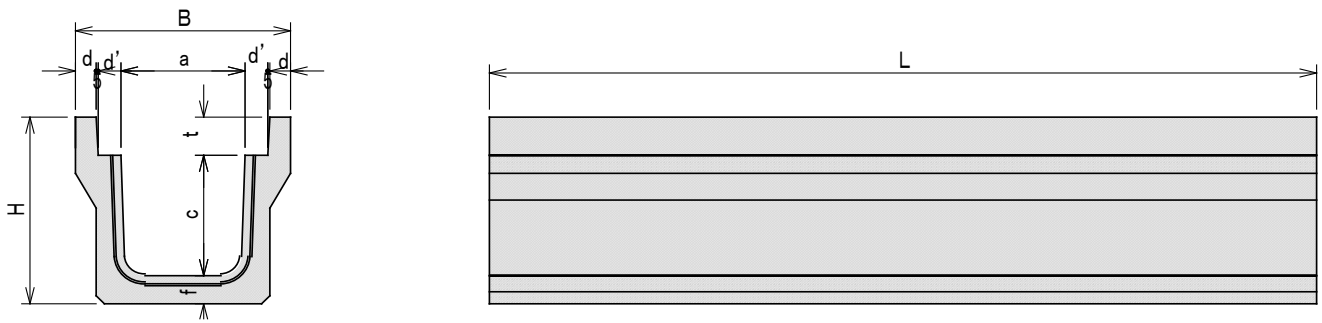

■寸法・重量 PU-2・PU-3

| 呼び名 | 寸法 | | | | | | | | | 参考重量 (kg) |
|-----|------|-----|-----|-----|----|----|----|----|--------------------|--------------|
| | B | a | c | d | d' | f | t | H | L | |
| 1種 | 250 | 450 | 250 | 250 | 40 | 55 | 55 | 55 | 2000 又は 1000 | 289 |
| | 300A | 500 | 300 | 300 | 40 | 55 | 60 | 60 | | 348 |
| | 300B | 500 | 300 | 400 | 40 | 55 | 65 | 65 | | 422 |
| | 300C | 500 | 300 | 500 | 40 | 55 | 70 | 70 | | 501 |
| | 400A | 600 | 400 | 400 | 40 | 55 | 65 | 65 | | 459 |
| | 400B | 600 | 400 | 500 | 40 | 55 | 70 | 70 | | 541 |
| | 500A | 720 | 500 | 500 | 45 | 60 | 70 | 70 | | 602 |
| | 500B | 720 | 500 | 600 | 45 | 60 | 75 | 75 | | 693 |
| 3種 | 250 | 460 | 250 | 250 | 45 | 55 | 65 | 65 | 327 | |
| | 300A | 520 | 300 | 300 | 50 | 55 | 70 | 70 | 410 | |
| | 300B | 520 | 300 | 400 | 50 | 55 | 70 | 70 | 461 | |
| | 300C | 520 | 300 | 500 | 50 | 55 | 80 | 80 | 617 | |
| | 400A | 630 | 400 | 400 | 55 | 55 | 70 | 70 | 504 | |
| | 400B | 630 | 400 | 500 | 55 | 55 | 80 | 80 | 620 | |
| | 500A | 750 | 500 | 500 | 60 | 60 | 90 | 90 | 685 | |
| | 500B | 750 | 500 | 600 | 60 | 60 | 90 | 90 | 828 | |

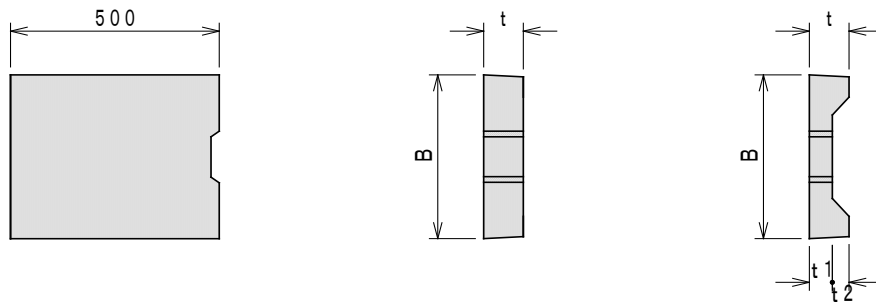


■寸法・重量 PC-3・PC-4

| 呼び名 | 寸法 | | | | | 参考重量 (kg) |
|-----|-----|-----|-----|----|----|--------------|
| | B | t | t1 | t2 | | |
| 1種 | 250 | 362 | 90 | 55 | 35 | 27 |
| | 300 | 412 | 95 | 55 | 40 | 33 |
| | 400 | 512 | 110 | 65 | 45 | 47 |
| | 500 | 622 | 125 | 75 | 50 | 65 |
| 3種 | 250 | 362 | 90 | - | - | 37 |
| | 300 | 412 | 95 | - | - | 45 |
| | 400 | 512 | 110 | - | - | 66 |
| | 500 | 622 | 125 | - | - | 91 |



ボルト固定式製品

断面図



平面図

