


RC床版（横断用）

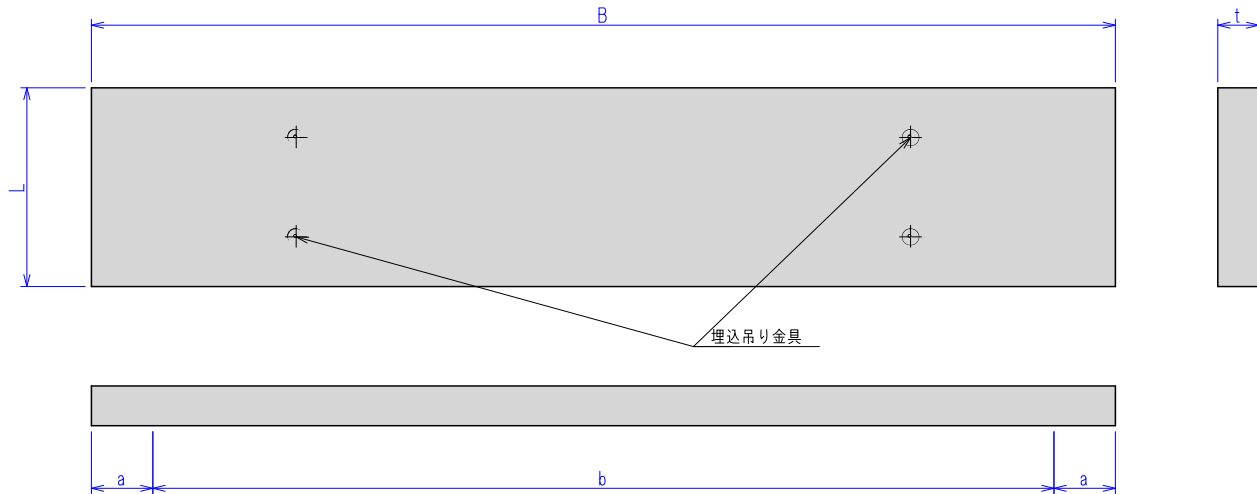

■寸法・重量 設計基準強度： $b \leq 1300 \sigma_{ck} = 30\text{N/mm}^2$ $b > 1300 \sigma_{ck} = 40\text{N/mm}^2$

サイズ		厚み		参考重量(kg)		設計条件					
全幅 B	溝幅 b	支承幅 a	T-25 ※2	T-25 ※1	T-25 ※1						
1300	1000	150	150	200	488	650	○溝蓋 後輪1輪荷重50KN ○床版 A、B活荷重				
1400	1100			220	525	700					
1500	1200			230	563	825					
1600	1300			250	600	880					
1700	1400	150	230	270	978	978	○溝蓋 後輪2輪荷重100KN ○床版 A、B活荷重				
1800	1500			1,035	1,035						
1900	1600			1,093	1,188						
2000	1700			1,150	1,250						
2100	1800			1,208	1,313						
2200	1900			1,265	1,485						
2400	2000			1,500	1,620						
2500	2100			1,563	1,688						
2600	2200	200	250	1,625	1,885	○床版 A、B活荷重					
2700	2300			1,688	1,958						
2800	2400			1,750	2,030						
2900	2500			1,813	2,103						
3000	2600	200	290	320	2,175	2,400	○床版 A、B活荷重				
3100	2700			2,248	2,480						
3200	2800			2,320	2,560						
3300	2900			2,393	2,640						
3500	3000			250	300	340		2,625	2,975		
3600	3100					2,700		3,060			
3700	3200					2,775		3,145			
3800	3300					2,850		3,420			
3900	3400			250	300	360		2,925	3,510		
4000	3500					3,000		3,600			
4100	3600					310		390	390	3,178	3,998
4200	3700								3,255	4,095	
4300	3800	3,333	4,193								
4400	3900	3,410	4,290								
4500	4000	300	320	410	3,488	4,388	○床版 A、B活荷重				
4700	4100			3,760	4,818						
4800	4200			3,840	4,920						
4900	4300			3,920	5,023						
5000	4400			440	440	4,000		5,500			
5100	4500					4,080		5,610			
5200	4600					4,160		5,720			
5300	4700					4,240		5,830			
5400	4800	300	320	460	4,320	6,210					
5500	4900			4,400	6,325						

※1 (t寸法 道路橋示方書・同解説に準拠した規格)

※2 仮設用他道路橋示方書に準じない場合

その他 荷重条件、支承幅等条件に合わせて検討いたします。